


Vehicle PC

V80T

- Equipped with high-performance ARM octa-core processor and Android 12 OS, up to 8GB+128GB capacity.
- 8-inch screen with 1000-Nits high definition display, multiple-point touch panel and customized keys, ensuring outdoor worker visibility.
- 4G LTE, dual-band Wi-Fi and Bluetooth 5.2 connectivity. Multi-satellite systems of GPS/Glonass/Beidou, with vehicle mushroom antenna for real-time tracking to your vehicle and asset management.
- With aviation plug charging interface, switchable for cigarette lighter interface or $\Phi 4.0$ power port, and the external 9V-36V DC wide voltage module is optional.
- Supports the battery-free mode, another optional 3.7V/2000mAh capacity battery.
- Available multiple navigation plug interfaces, and also supports USB/DB9/LAN/CAN and other interface extensions.
- Two bracket mounting methods, VESA and RAM are suitable for almost any vehicle-mounted workplaces.
- IP65 dustproof and waterproof, morphed to endure outdoor applications prone with shock, vibration and extreme temperature.

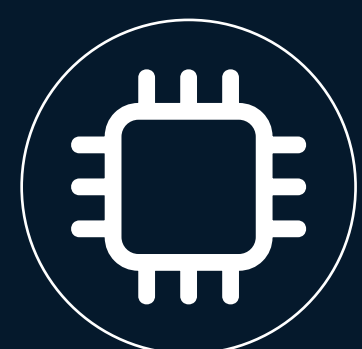

ARM octa-core processor



Android 12 Operating System



8-inch screen



1000cd/cm²




Dual frequency Wi-Fi




GPS/GLONASS/Beidou



Stable power supply



Rich interface extensions

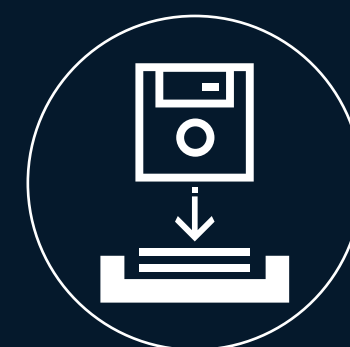

VESA/RAM




IP65

Vehicle PC V80T

Specifications



 **CPU**
ARM octa-core processor

 **Operating System**
Android 12 (GMS)

 **Memory**
RAM: 8GB LPDDR4X
ROM: 128GB UFS

 **Display**
Type: LCD
Size: 8 inch 16:10
Resolution: 800*1280 IPS
Brightness: 1000cd/m²

 **Touch Pannel**
5 points Capacitive

 **Dimension/Weight**
218.1*154.5*23.0mm
611g

 **Buttons**
Power *1
Volume Adjustment Key (+) *1 (F1 Key)
Volume Adjustment Key (-) *1 (F2 Key)
Customizable *1 (F3 Key)
Customizable *1 (F4 Key)

 **Speaker**
2.5W Single Horn

 **Battery**
Built in 2032 RTC dry battery
Optional:
Built in polymer lithiumion battery
2000mAh/3.7V


 **Internet**
4G/Dual-band WiFi/BT5.2

 **GPS**
GPS/GLONASS/Beidou

 **NFC**
Optional

 **Certification**
IP65 MIL-STD-810H

 **Adapter**
12V 4A DC φ4.0 Adapter

 **I/O Interface**
SIM card slot MICRO-SIM * 1
Standard USB-A port / Data transmission
Power interface DC input (Input: 12V)
PORT1 (M12-12) (optional)
100M network port
PORT2 (M12-12) (optional)
RS232 *1+RS232/RS485 (standard) *1
PORT3 (M12-12) (optional)
USB 2.0 *2+USB 2.0 (Default) / CAN*1
USB2.0 standard interface *3; Optional CAN
for customer debugging

 **Rugged Features**
Working temperature:
-20 °C to 60 °C (DC adapter mode)
-10°C to 60 °C(Battery mode)
Storage temperature: -30 °C to 70 °C
±8kV contact discharge,
±15kV air discharge
Humidity: 95% Non-Condensing



* The technical specifications of this product are subject to change without prior notice